



ColecoVision Pause Mod Kit NTSC Console Installation Guide



Table of Contents

Product overview2

What’s included2

Tools required2

How does it work?2

Installation instructions3


Product overview

The Lundy Electronics **ColecoVision Pause Mod Kit** is the first pause mod offering designed to be completely hidden from view without any permanent modifications to the case.

This kit requires the user to be comfortable with disassembling the ColecoVision, have the ability to solder, and be comfortable cutting two circuit board traces. This document does not explain how to disassemble or reassemble the ColecoVision which can be found easily online.

What's included

- Populated Pause Mod PCB
- All necessary wiring
- LED assembly
- LED mounting bracket
- Cable ties

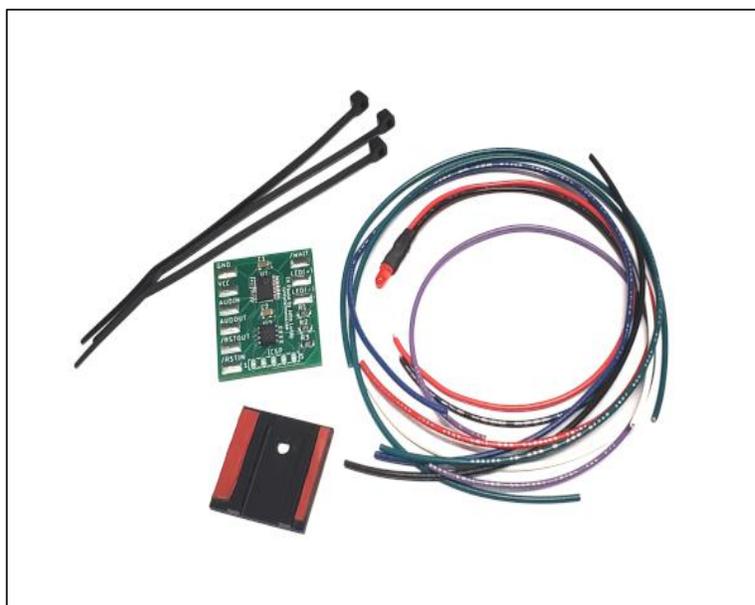

Tools required

- X-Acto knife (with fine tip blade)
- Soldering iron
- Tin snips
- Flush cutting pliers
- Wire strippers
- Hot glue (optional)

How does it work?

The Lundy Electronics **ColecoVision Pause Mod Kit** uses a small microcontroller to monitor the existing factory reset push button to detect if the switch was held over a specified amount of time to enable pause mode or detect a simple press of the switch for a normal reset. To enable this capability, one trace will need to be cut to isolate the reset switch from the original circuitry to allow the microcontroller to monitor it and send out a reset pulse as needed. This modification is totally seamless, and there is no indication anything has changed for the end user. If the microcontroller detects a long press of the reset switch, the controller will illuminate an LED to notify the user it is safe to let go of the reset switch to enable pause mode. During pause mode, an analog switch IC controlled by the microcontroller is used to force the Z80 /WAIT low to freeze the system and opens the audio line to disable any sound that may have remained active while pause was initiated. During pause, the LED indicator will fade in and out to show that pause is active. A regular reset push will exit pause mode and continue where you left off.

Please read these instructions in their entirety before performing this installation.

Installation instructions

Note: Your Pause Mod Kit has been tested carefully by Lundy Electronics which includes visual inspection under a microscope, full bench testing, and heat stress testing to insure no faulty solder joints or issues. We guarantee that this product is fully operational, and Lundy Electronics is not responsible for damages caused by static discharge, improper handling, incorrect installation, or damage caused by soldering.

With the ColecoVision PCB completely removed from the case, perform the following steps.

Step 1: Using an X-Acto knife, very carefully cut the following two PCB traces. See **Figure 1** for reset line cut and **Figures 2a and 2b** for audio line cut.

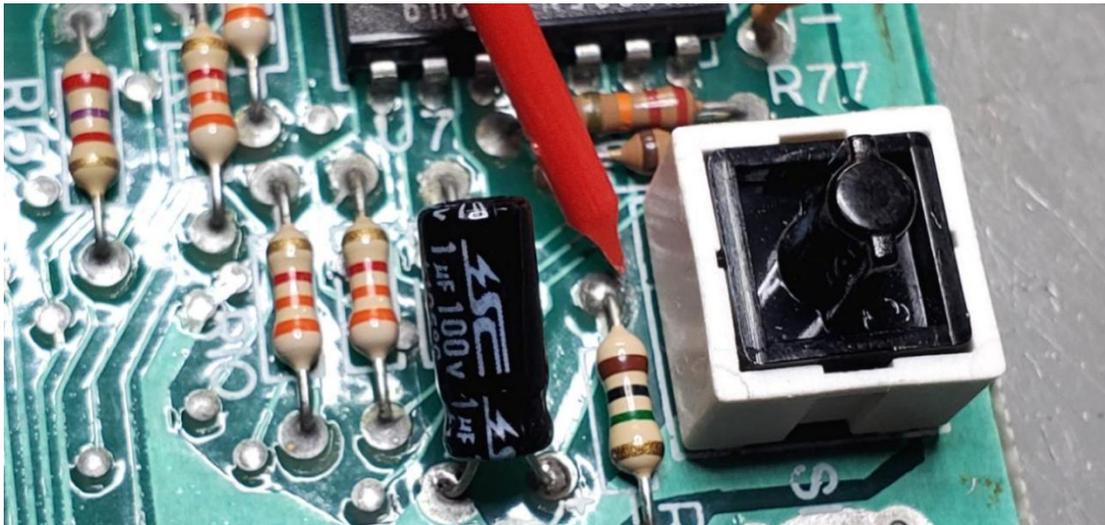


Figure 1: Reset line cut

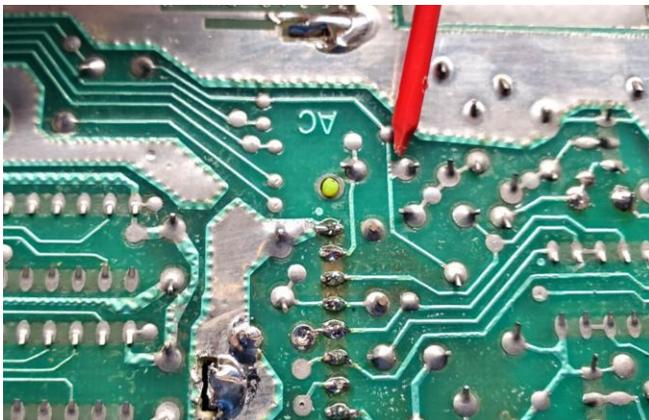


Figure 2a: Audio line to cut



Figure 2b: Audio line cut

Step 2: Solder the following wires from the kit to the designated solder locations of the ColecoVision bottom side PCB.

Solder the two green wires to audio connections. See **Figure 3**.



Figure 3: Solder two Green wires to audio connections

Solder white and blue wires to reset connections. See **Figure 4**.

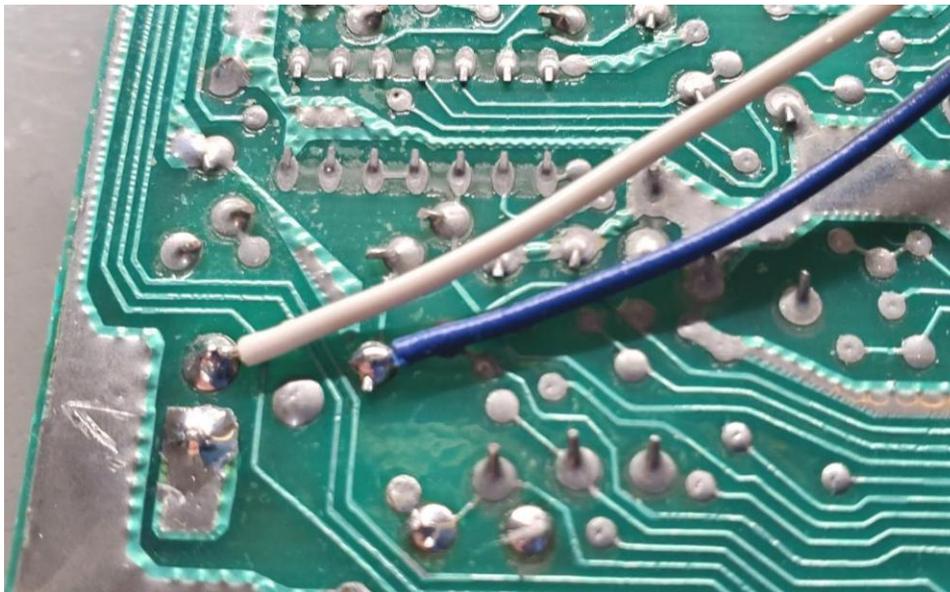


Figure 4: Solder White and Blue wires to reset connections

Solder red (+5) and black (GND) to power connections. See **Figure 5**.

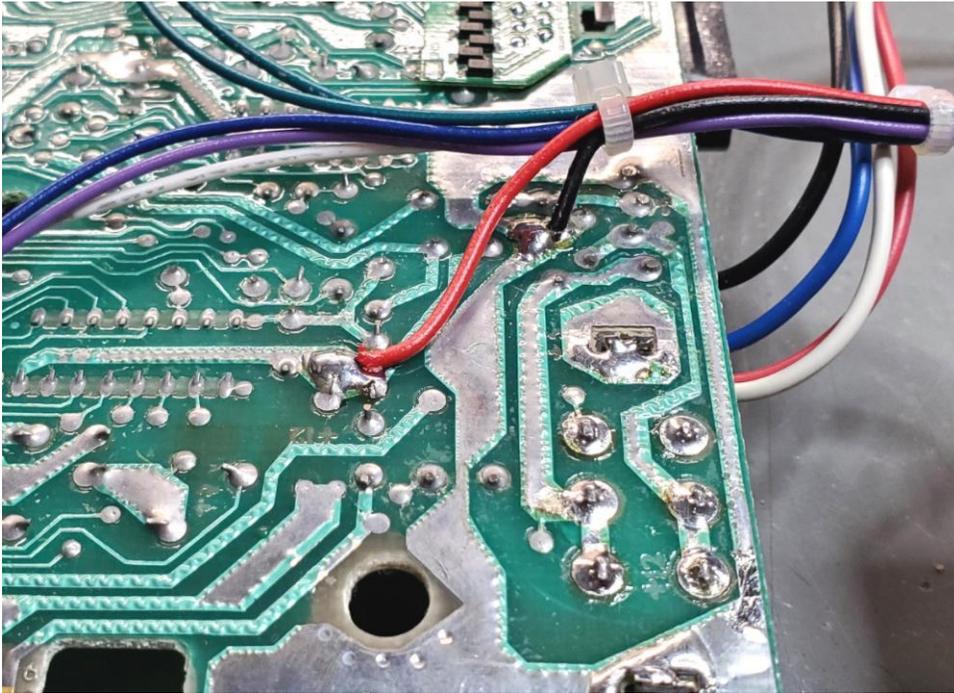


Figure 5: Solder Red and Black to power connections

Solder violet wire to Z80 /WAIT pin 24 connection. See **Figure 6**.

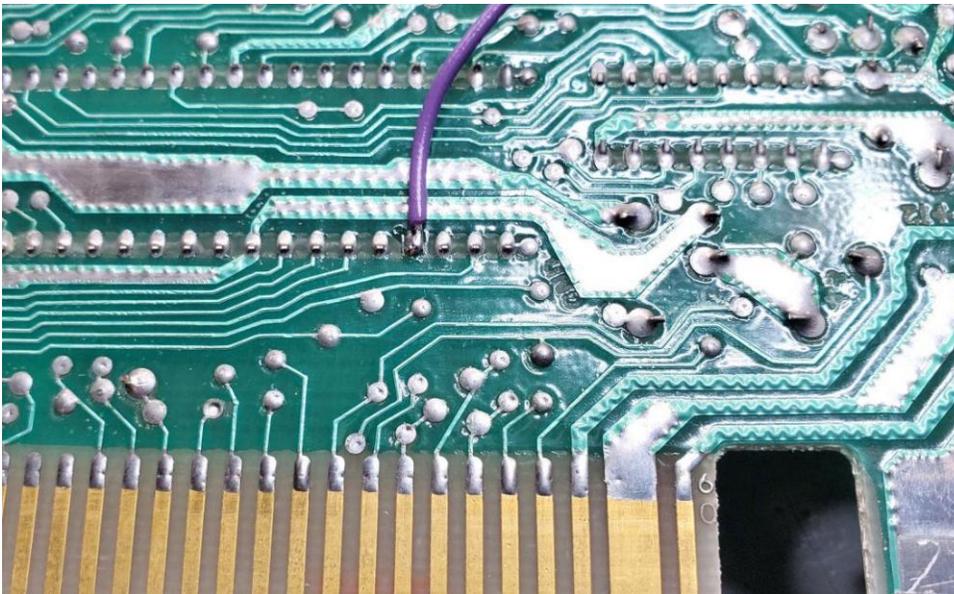


Figure 6: Solder Violet wire to Z80 /WAIT connection

Step 3: Flip the ColecoVision PCB to show the top side on the PCB. Cleanly trim, strip, and solder wires to the Pause Mod PCB as follows. See **Figure 8**.

- Solder black wire to GND pad.
- Solder red wire to VCC pad.
- Solder green wires to AUDIN and AUDOUT pads (order doesn't matter).
- Solder blue wire to /RSTOUT pad.
- Solder white wire to /RSTIN pad.
- Solder violet wire to /WAIT pad.
- Solder LED assembly red wire to LED(+) pad.
- Solder LED assembly black wire to LED(-) pad.

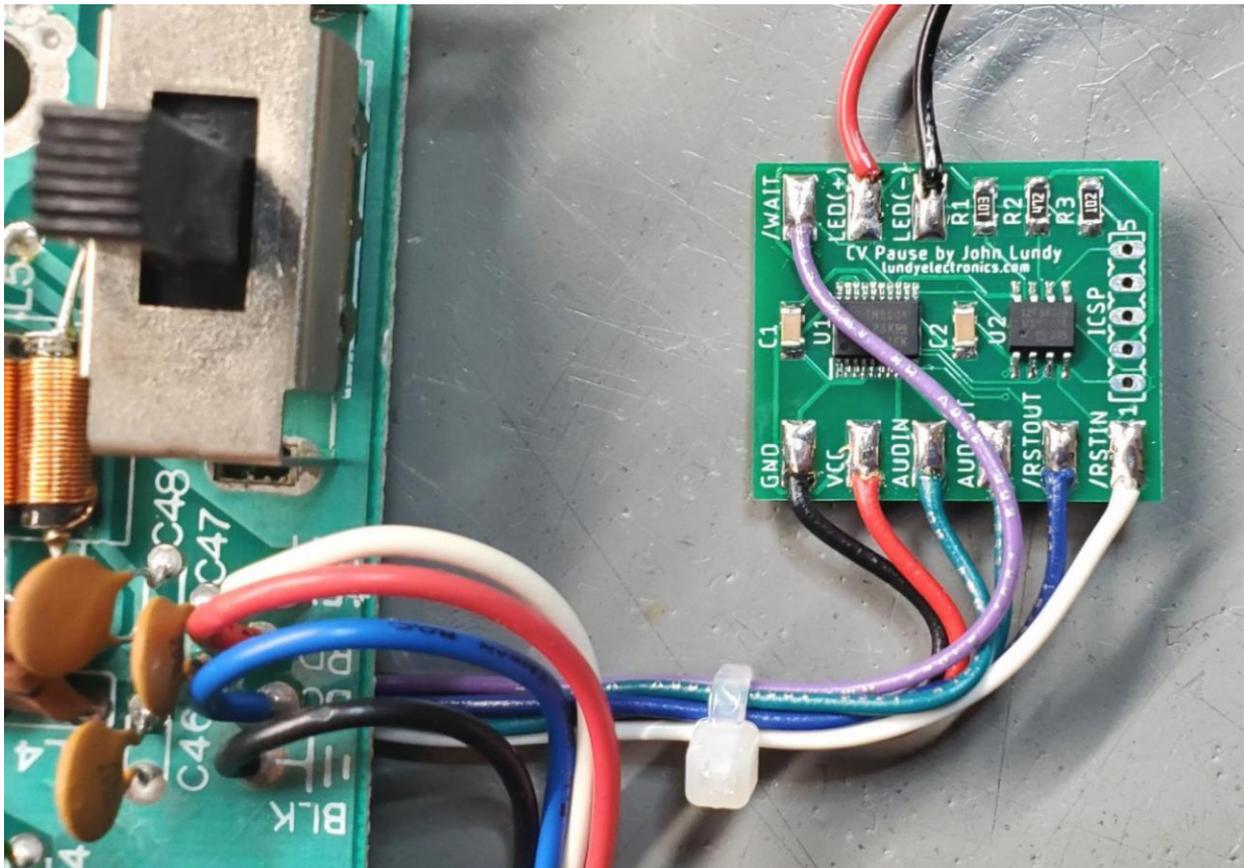


Figure 8: Cleanly trim, strip, and solder wires to the Pause Mod PCB

Step 4: Verify all connections and work performed so far. Look closely for shorts to adjacent pins/pads and traces.

Step 5: Install ColecoVision PCB without RF shields into lower case housing to test unit for proper operation. See **Figure 9** for proper orientation of Pause Mod placement.

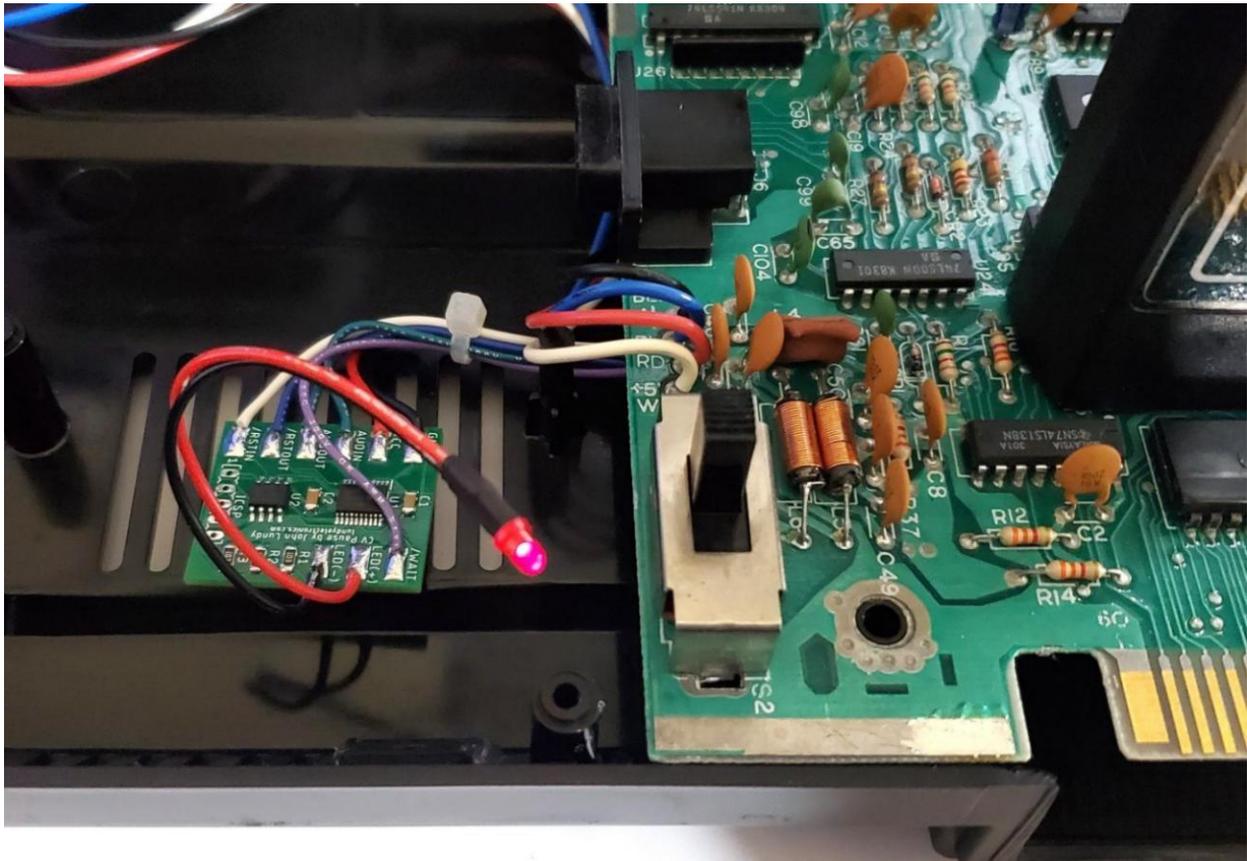


Figure 9: Proper orientation of Pause Mod placement

Step 6: Connect the ColecoVision video, audio, power source, and joystick connections as normal and power on the unit. Perform the following steps to conclude initial testing. If any of these steps fail, immediately turn off the unit and verify all work was performed correctly.

- Verify unit powers up and displays the normal “Insert Cartridge” message to verify unit is operational
- Press the reset button to verify the unit performs a normal reset.
- Power off unit and insert a cartridge and power on.
- Start a game and then hold the reset switch until the LED illuminates and then let go to verify unit is paused and audio is no longer present. The indicator LED should fade in and out while paused.
- Press the reset button normally to verify pause mode stops and audio is present, LED turns off, and game continues as normal.

Step 7: Remove PCB from lower housing and install wire cable ties as shown in **Figure 10**.

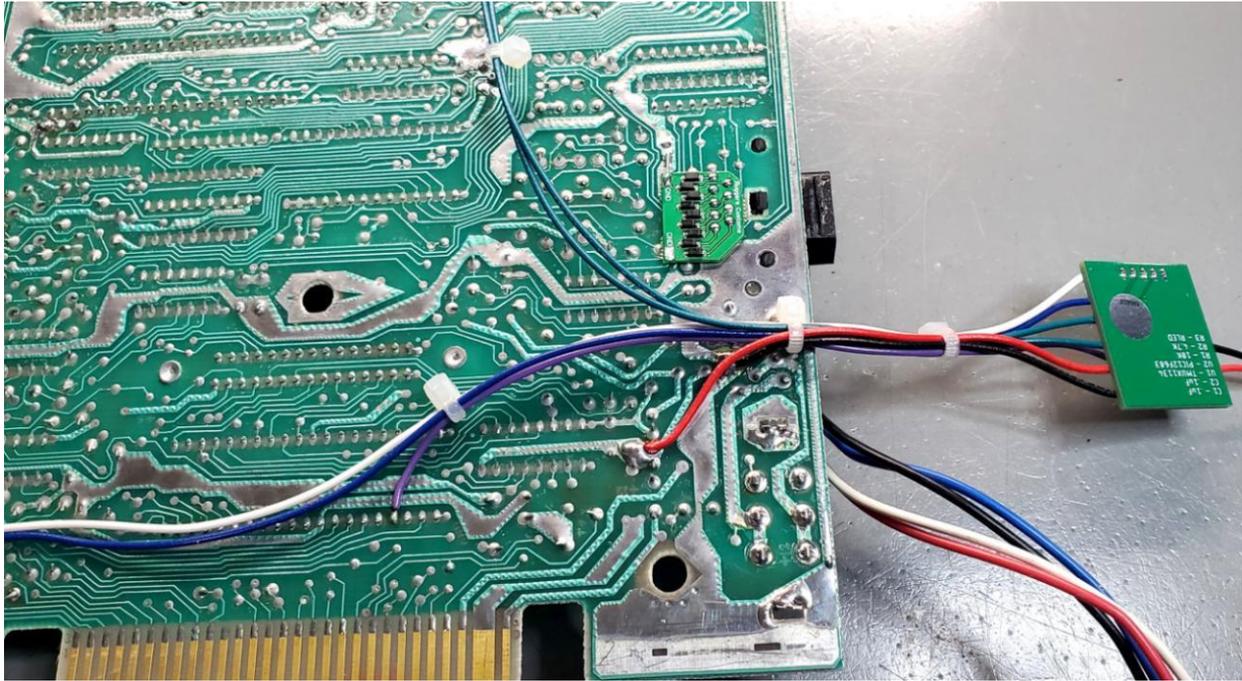


Figure 10: Install wire tie wraps

Step 8: Install the LED mounting bracket (without LED inserted) in the empty lower case housing as shown in **Figures 11a and 11b** for proper placement and orientation. Peel off the double-sided mounting tape backing and firmly press the bracket in place as shown.

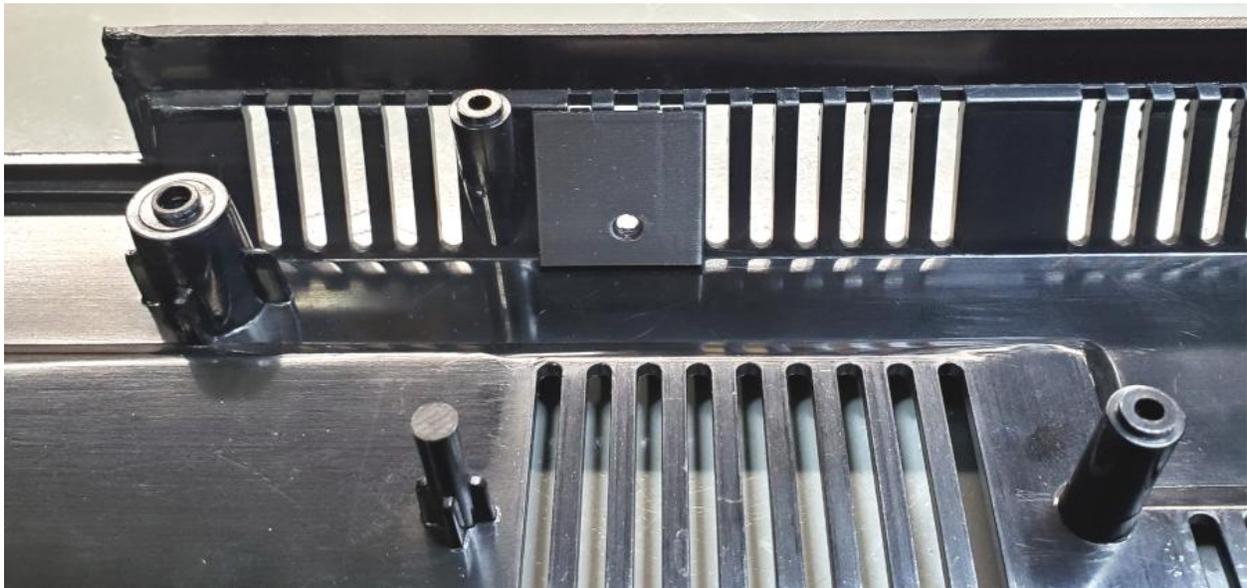


Figure 11a: LED mounting bracket placement in lower case housing



Figure 11b: LED mounting bracket placement in lower case housing

Step 9: The lower shield requires adding a notch with tin snips to the lower RF shield to make room for the new Pause Mod controller wiring. See **Figure 12**.

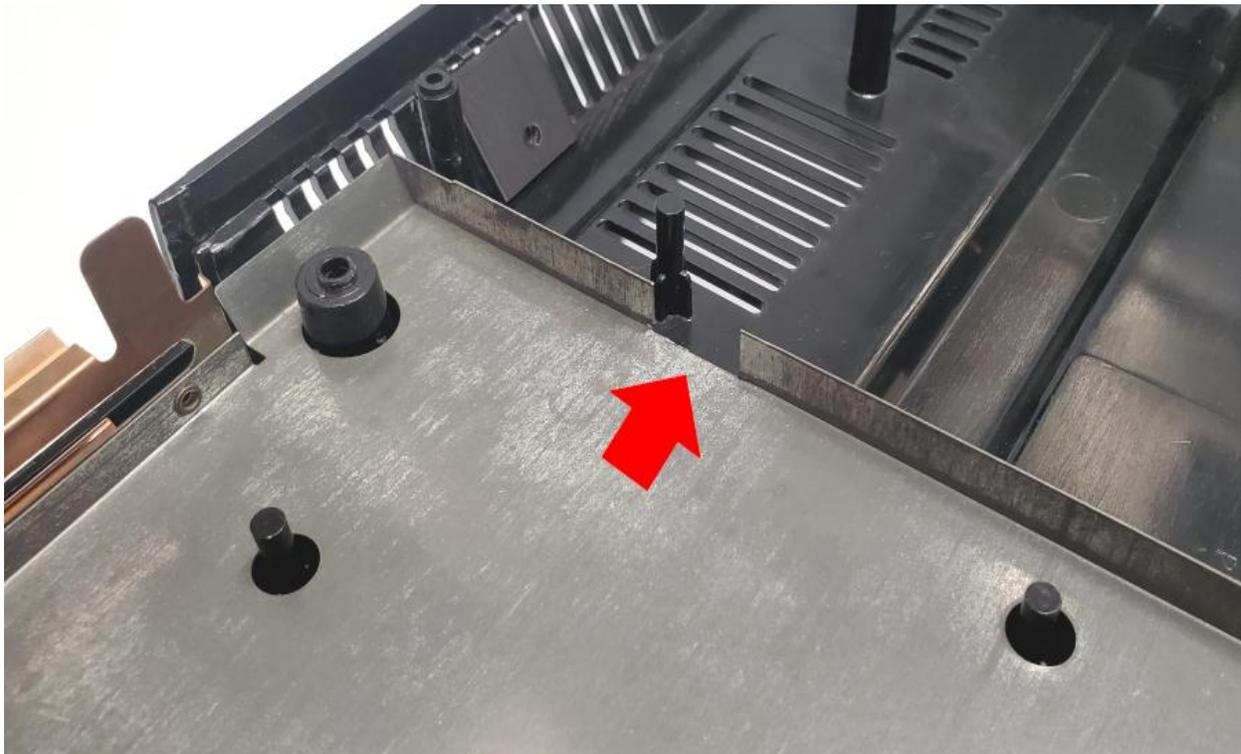


Figure 12: Add notch to lower shield

Step 10: Reinstall PCB for final mounting installation, place the Pause Mod PCB as shown in **Figure 13**, and push the indicator LED into the mounting bracket. It is designed to fit snugly so it can be removed later if needed. Hot glue can be used to hold it more securely if desired. Note: The Pause Mod PCB is designed to stay loosely in place without the need for permanent mounting to make servicing easier in the future.



Figure 13: Placement of Pause Mod PCB

Step 11: Before completely closing the ColecoVision back up, first perform the same test procedure in Step 6 again to verify everything is working correctly.

Installation is now complete.

Thank you for choosing Lundy Electronics, and we hope you enjoy your ColecoVision product.

